



### Description

- Essential spectrum for general plant with aesthetic color appearance.
- Precise light distribution to reach high PPFD for vertical garden
- Suitable for human visual system and excellent color saturation.
- Long lifetime with less energy consumption.
- Water and dust resistance
- Support and advice for your requirements.

### Specification

**Housing :** Die-cast aluminum body

**Painting :** Polyester powder coat finish in white

**Light Source :** LED Horticulture COB

**Power :** 40W

**Input Voltage :** 100 - 240VAC

**Lamp adjustment :** Adjustable in both horizontal 0-360° and vertical 0-70°

**Half Beam Angle :** 11, 17, 29, 51 degree




**Control gear :** On-off 240V AC driver, Phase cut dimming optional, 0-10V Dimming optional

**Installation :** Recess to T-bar or conceal ceiling

**LED Lifetime :** 40,000 hours

**IP Rating :** IP66

### Dimension

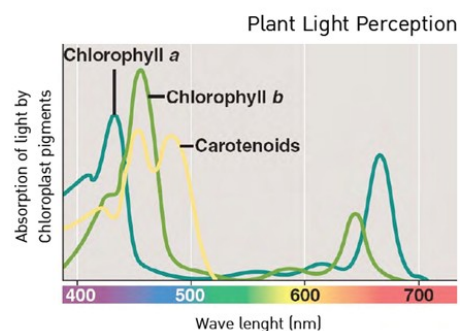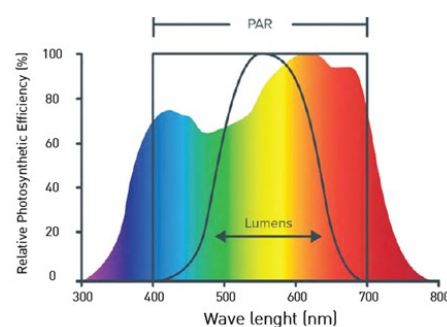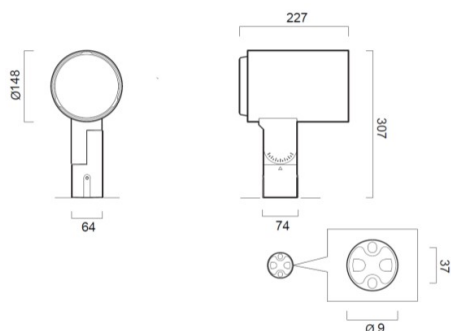

Product	Power(W)	Voltage(V)	Application
HLSLA06-VW	40W	100 - 240VAC	Vertical Garden