



Description

- Surface down-light LED with essential spectrum for general plant growth.
- Precise light distribution to reach high PPFD for vertical garden
- Suitable for human visual system and excellent color saturation.
- Long lifetime with less energy consumption.
- Support and advice for your requirements.

Specification

Housing : Die-cast aluminum body

Painting : Polyester powder coat finish in white

Light Source : LED Horticulture COB

Power : 40W

Input Voltage : 100 – 240VAC

Lamp adjustment : Adjustable in both horizontal 0-360° and vertical 0-45°




Half Beam Angle : 14, 24, 36, 45, 60 degree

Control gear : On-off 240V AC driver, Phase cut dimming optional, 0-10V Dimming optional

Installation : Recess to T-bar or conceal ceiling

LED Lifetime : 40,000Hrs

Dimension

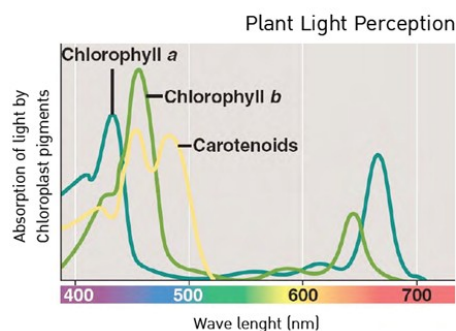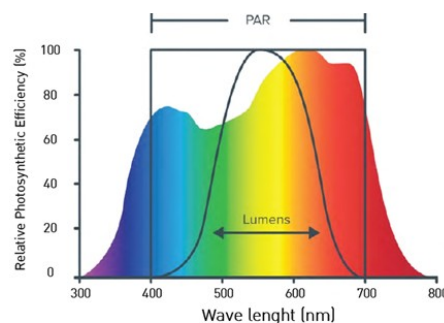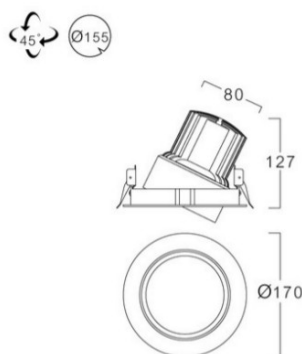

Product	Power(W)	Voltage(V)	Application
HLDLR150	40W	100 - 240VAC	Home planting, Vertical Garden