

LED Recessed Fluorescent

TIS RPEL/UGR

Application




This luminaire is designed to use for office buildings, schools, storage areas, hospitals, and other working areas where is required highly uniformity illumination, etc.

Specification

Housing	Extruded aluminium
Finishing	Powder coated in white
Diffuser	Opal
Mounting	Recessed T-bar (for Concealed ceiling recommend to use additional frame)
Power	40W
Source	LED Module
Lamp Colour	4000/6000K
Luminaire Output	4000/4000 lm
Control Gear	Separate driver
Power Supply	220VAC 50Hz
IP Rating	40
Luminaire Lifetime	50,000 hrs.
Equivalent	T5 2x28W/T8 2x36W
Remarks	UGR<19

Ordering Data

Model	Watt
RPEL300/L/UGR/V2-40LED	40W
RPEL600/L/UGR/V2-40LED	40W
RPEL600/S/UGR/V2-40LED	40W

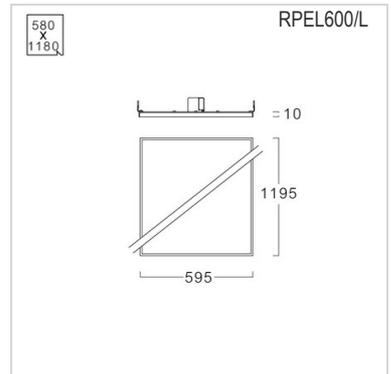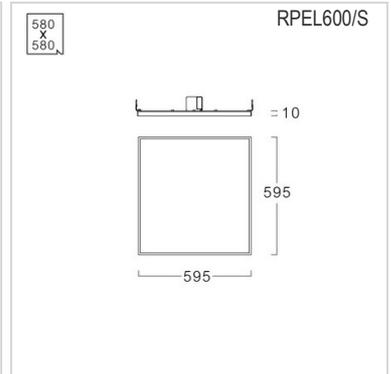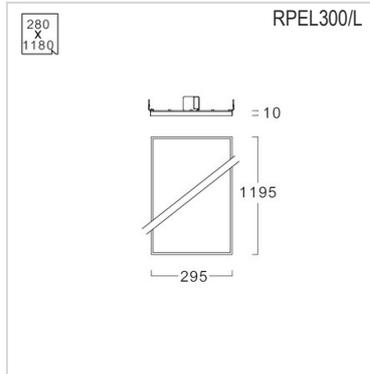

Related Products

