

GDSL 100



Housing : Die cast aluminium body with precise fins for heat dissipation finished in silver grey color

Front Cover : Flat cover made of die cast aluminium finished in silver grey color

Painting : Polyester powder coated

Gasket : Weatherproof and durable silicone rubber

Front Glass : Clear optical lens made of acrylic plastic

Cable Entry : Silicone rubber grommet with VDE 3x0.75 mm²
1 M long

Fastenning : All external screws are made of stainless steel

Lamp Adjustment : Fully adjustable bracket allowing 0-90° elevation


LED : High quality LED,50,000 Hrs,maintenance fee

Mounting : S-Base - GDSL 100/S

B-Base - GDSL 100/B



blue / white / warm white / cool white /
red / amber / green



GDSL 110



Housing : Corrosion resistant die cast aluminium body finished in silver grey color

Front Cover : Flat cover made of die cast aluminium finished in silver grey color

Painting : Polyester powder coated

Gasket : Weatherproof and durable silicone rubber

Front Glass : Clear optical lens made of acrylic plastic

Cable Entry : Silicone rubber grommet with VDE 3x0.75 mm²
1 M long

Fastenning : All external screws are made of stainless steel

Lamp Adjustment : Fully adjustable bracket allowing 0-90° elevation

LED : High quality LED,50,000 Hrs,maintenance fee

Mounting : S-Base - GDSL 110/S


B-Base - GDSL 110/B




blue / white / warm white / cool white /
red / amber / green



Project : Dusit thani hua hin hotel & resort, prachuap khiri khan

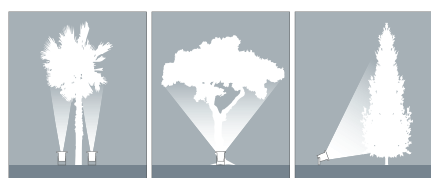

Installation Guide

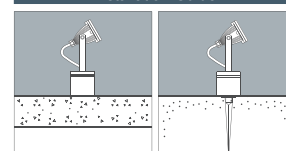

On Concrete

In Soil