



EFL/200W/SMD

Application


Floodlight is designed to illuminate building facade, building security, indoor and outdoor stadiums, monuments, statues, exhibition halls, shopping centers, showrooms, display areas, residences, etc.

Specification

Housing	Die-cast aluminium
Finishing	Powder coated in grey
Lens	Clear toughened glass
Gasket	Silicone rubber
Mounting	Surface
Power	200W
Source	LED-SMD
Lamp Colour	3000/6500K
Luminaire Output	17000/19000 lm
Beam Angle	120 degree
Control Gear	Built-in driver
Power Supply	220VAC 50Hz
IP Rating	65
Luminaire Life Time	30,000 hrs.
Equivalent	MH 400W

Ordering Data

MODEL	WATT
EFL200/BL-200LED/3K-XSXD	200W
EFL200/BL-200LED/6.5K-XSXD	200W

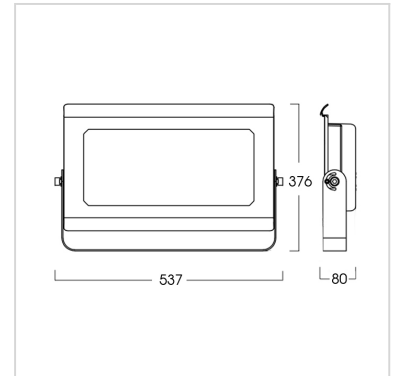

RELATED PRODUCTS

