

# LED Floodlight / Spotlight




TIS FLL201/B

## Application

Floodlight is designed to illuminate building facade, building security, indoor and outdoor stadiums, monuments, statues, exhibition halls, shopping centers, showrooms, display areas, residences, etc.

## Specification

<b>Housing</b>	Die-cast aluminium
<b>Finishing</b>	Powder coated in black
<b>Lens</b>	Clear toughened glass
<b>Gasket</b>	Silicone rubber
<b>Dimension</b>	95x140x175 mm.
<b>Mounting</b>	Surface
<b>Power</b>	5W
<b>Source</b>	LED-COB
<b>Lamp Colour</b>	3000/4000K
<b>Luminaire Output</b>	360 lm
<b>Beam Angle</b>	12/24/36 degree
<b>Control Gear</b>	Built-in driver
<b>Power Supply</b>	220VAC 50Hz
<b>IP Rating</b>	66
<b>Luminaire Lifetime</b>	30,000 hrs.
<b>Equivalent</b>	MR16 50W

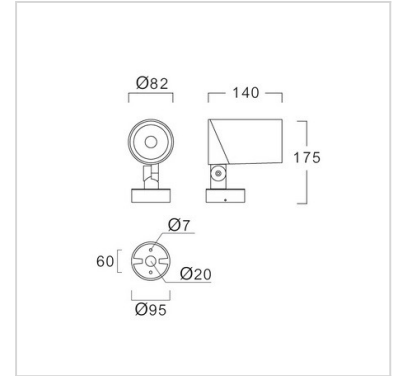

## Ordering Data

Model	Watt
FLL201/B-5LED	5W


## Related Products



FLL211/B



FLL221/B



LED-COB

