

# Zoe

Z4 420-910 lm 5-12 W 150-350 mA 35 V 940 white/black + cable 1500 mm

ARTICLE NO: 167640F01112




● Black

● White




## Dimension



Dimension (mm): D: 210 H: 330 SH: 1500

## Photometry

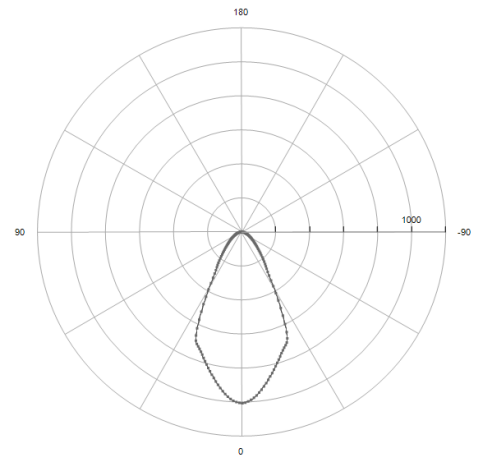

### Light output ratio

LOR	100
ULOR	0
DLOR	100

### UGR values

X=4H, Y=8H	S = 0,25H
Radiant class	70/50/20
Transverse	17.2
Longitudinal	17.2

### Classification

BZ	BZ 1
UTE	1.00 B
DIN	A60
CIE	77 93 99 100 100

## Product description

**Chromaticity tolerance (initial MacAdam):** 2 **Installation:** Suspended (S),

Suspended (S) **Lumen maintenance factor:** 50000h L80 B10 at 25°C

**Optic material:** Satined prismatic lens dome for uniform light distribution, Satined prismatic lens dome for uniform light distribution **IP protection :** IP20 **Led colour:**

4000K, CRI>90, 4000K, CRI>90 **Weight:** 1,00 kg

**Correlated colour temperature - CCT:** 4000 K **Colour rendering index - CRI:** 90

**Emergency module:** No emergency module, No emergency module

**Switching options:** Single Switching, Single Switching **Driver:** Driver not included, order separately, Driver not included, order separately **Forward voltage (Vf):** 36.03

V **Power Supply Range:** 150 - 350mA DC **Energy card img 1 :** LA2

**Colour upper body part:** Black, Black **Material:** Aluminium, powder coated, Aluminium, powder coated **Colour bottom body part:** White, White

**Colour of optics:** White, White

Power (W)	Power Supply (mA)	Luminaire Efficacy (lm/W)	Nominal luminaire luminous flux
4	150	84	420
6	200	81	550
8	250	79	670
10	300	77	800
12	350	74	910

## CeilingCup



### Round RD 134

109R41A0002

D 134 1x125-500mA 36V FO black

## Drivers



### Driver PF22

702120264

22W 125-500mA max.44V FO