


# Atos RIQ

32A 2x 370-1000 lm 3-11 W 150-450 mA 24 V 930 20° IP20 white


ARTICLE NO: 1931C153201



● White

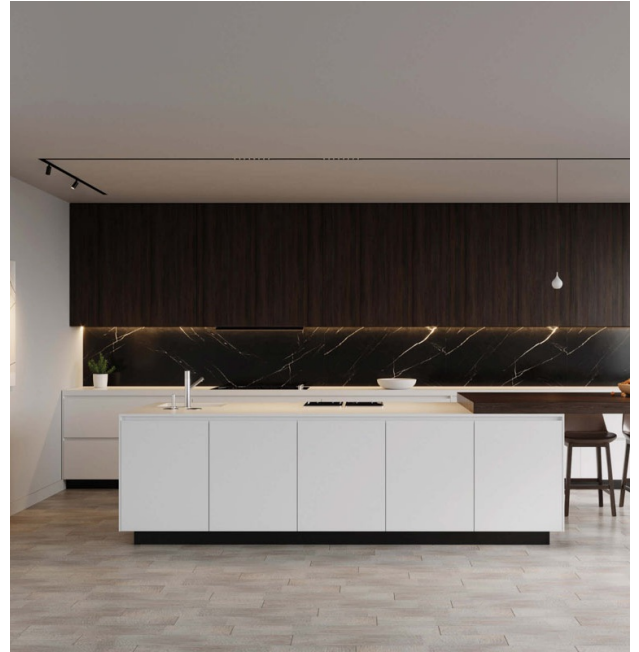


## Dimension

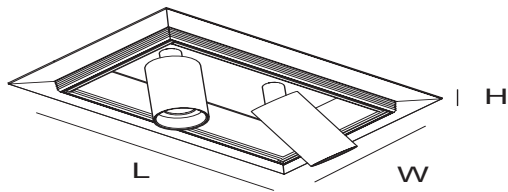

<b>Dimension (mm):</b>	<b>L:</b> 170	<b>W:</b> 89	<b>H:</b> 120
<b>Cut Out (mm):</b>	<b>Lco:</b> 218	<b>Wco:</b> 138	<b>Hco:</b> 124

## Photometry

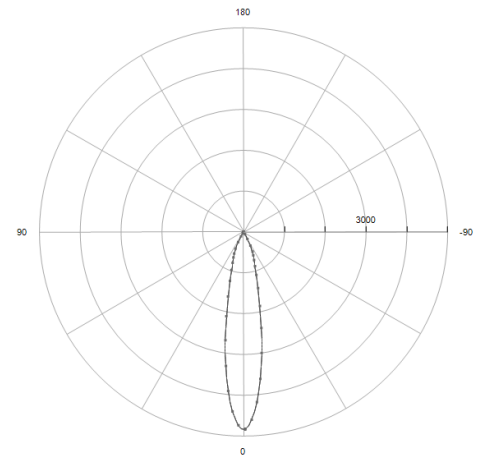

### Light output ratio

LOR	100
ULOR	0
DLOR	100

### UGR values

X=4H, Y=8H	S = 0,25H
Radiant class	70/50/20
Transverse	6.2
Longitudinal	6.2

### Classification

BZ	BZ 1
UTE	--
DIN	A60
CIE	99 100 100 100 100

# Atos RIQ

32A2x 370-1000 lm 3-11 W 150-450 mA 24 V 930 20° IP20 white

ARTICLE NO: [1931C153201](#)

## Product description

**Installation:** Recessed trim-less (RI) **Optic material:** Metalized polycarbonate with lacquer finish, uniform distribution-beam angle 20° **Beam angle:** 20 ° **IP protection :** IP20 **Light source luminous flux:** 494 lm **Driver:** Driver not included, order separately **Forward voltage (Vf):** 13.45 V **Colour:** White **Optics:** 20°

**Luminaire luminous flux:** 1001 lm **Power:** 11 W

**Chromaticity tolerance (initial MacAdam):** 3 **Lumen maintenance factor:** 50000h

L90 B10 at 25°C **Led colour:** 3000K, CRI>90

**Correlated colour temperature - CCT:** 3000 K **Colour rendering index - CRI:** 90

**Weight:** 0,70 kg **Cut out width :** 138 mm **Cut out length:** 218 mm **Material:**

Aluminium, powder coated

Power (W)	Power Supply (mA)	Luminaire Efficacy (lm/W)	Nominal luminaire luminous flux
3	150	111	370
5	200	108	490
6	250	104	600
7	300	100	710
8	350	97	810
9	375	96	860
10	400	94	910
11	450	91	1000

## Drivers



### Driver PF22

[702120264](#)

22W 125-500mA max.44V FO