

Atos RVQ


32A 2x 840-1000 lm 8-10 W 125-150 mA 66 V 940 50° IP20 white

ARTICLE NO: 1931B165201




● White


Dimension

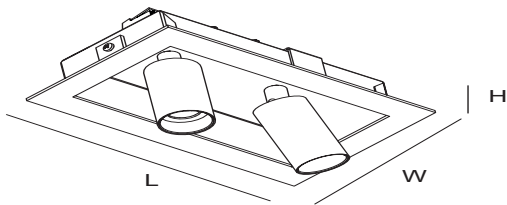

Dimension (mm):	L: 200	W: 116	H: 120
Cut Out (mm):	Lco: 204	Wco: 120	Hco: 124

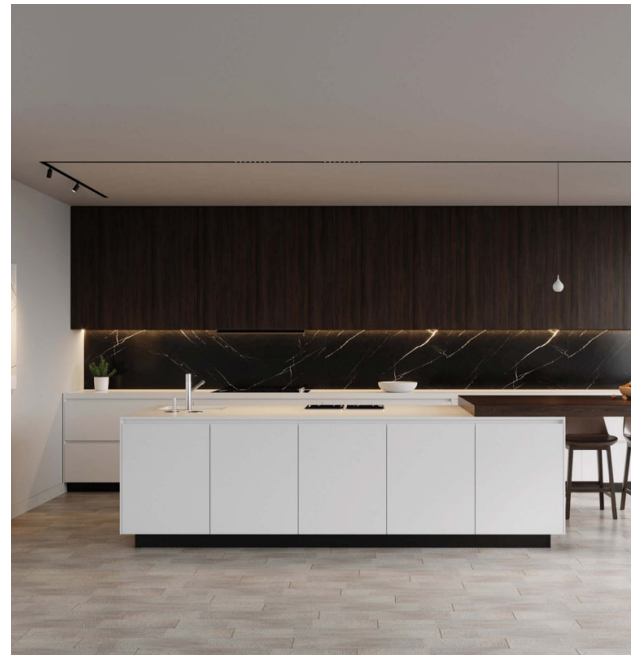

Photometry

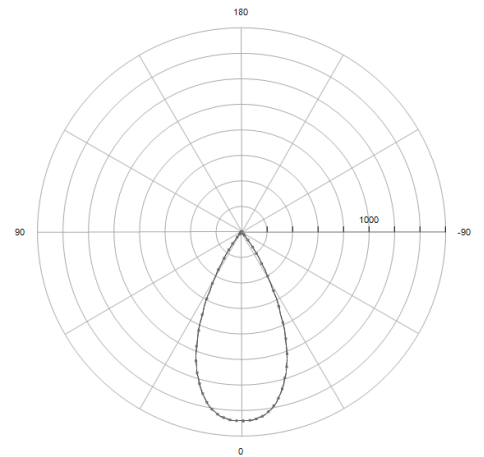

Light output ratio

LOR	100
ULOR	0
DLOR	100

UGR values

X=4H, Y=8H	S = 0,25H
Radiant class	70/50/20
Transverse	21.1
Longitudinal	21.1

Classification

BZ	BZ 1
UTE	--
DIN	A60
CIE	99 100 100 100 100

Atos RVQ

32A 2x 840-1000 lm 8-10 W 125-150 mA 66 V 940 50° IP20 white

ARTICLE NO: 1931B165201

Product description

Installation: Recessed ceiling (RV) **Optic material:** Spot reflector 50° **Beam angle:** 50 ° **IP protection :** IP20 **Light source luminous flux:** 1242 lm **Driver:** Driver not included, order separately **Forward voltage (Vf):** 36.03 V **Colour:** White **Optics:** 50° **Luminaire luminous flux:** 1004 lm **Power:** 10 W **Chromaticity tolerance (initial MacAdam):** 2 **Lumen maintenance factor:** 50000h L80 B10 at 25°C **Led colour:** 4000K, CRI>90 **Correlated colour temperature - CCT:** 4000 K **Colour rendering index - CRI:** 90 **Weight:** 0,80 kg **Cut out width :** 120 mm **Material:** Aluminium, powder coated **Cut out length:** 204 mm

Power (W)	Power Supply (mA)	Luminaire Efficacy (lm/W)	Nominal luminaire luminous flux
8	125	102	840
10	150	101	1000

Drivers



Driver PF22

702120264

22W 125-500mA max.44V FO