

LED Surface Downlight

TIS **SDL170**

Application


Surface downlight is designed to use for office buildings, shopping centers, convenience stores, modern trade stores, discount stores, hotels, restaurants, residences, recreational centers, museums, etc.

Specification

Housing	Die-formed aluminium
Finishing	Powder Coated in white or black
Mounting	Surface
Power	20/27W
Source	LED-SMD
Lamp Colour	3000/4000K
Lamp Output	20W : 2000/2160 lm 27W : 2800/2717 lm
Luminaire Output	20W : 1538/1661 lm 27W : 2516/2717 lm
Beam Angle	80 degree
Control Gear	Built-in driver
Power Supply	220VAC 50Hz
IP Rating	20
Luminaire Lifetime	35,000 hrs.
Equivalent	20W : CFL 2x18W 27W : CFL 2x26W

Ordering Data

Model	Watt
SDL170/WH-20LED	20W
SDL170/WH-27LED	27W

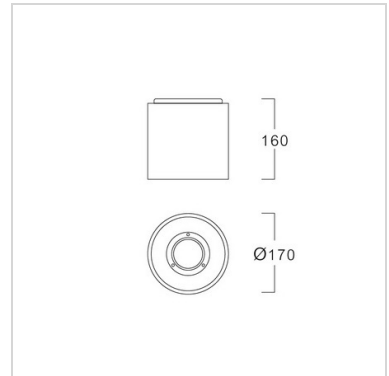

Related Products

