

LED Surface Downlight

TIS **SDL137**

Application


Surface downlight is designed to use for office buildings, shopping centers, convenience stores, modern trade stores, discount stores, hotels, restaurants, residences, recreational centers, museums, etc.

Specification

Housing	Die-formed aluminium
Finishing	Powder coated in white or black
Mounting	Surface
Power	10/14W
Source	LED-COB
Lamp Colour	3000/4000/5000K
Lamp Output	10W : 1120/1215/1290 lm 14W : 1540/1660/1805 lm
Luminaire Output	10W : 911/984/1066 lm 14W : 1252/1352/1465 lm
Beam Angle	50 degree
Control Gear	Built-in driver
Power Supply	220VAC 50Hz
IP Rating	20
Luminaire Lifetime	35,000 hrs.
Equivalent	10W : PAR30 50W 14W : PAR30 75W

Ordering Data

Model	Watt
SDL137/WH-10LED	10W
SDL137/WH-14LED	14W

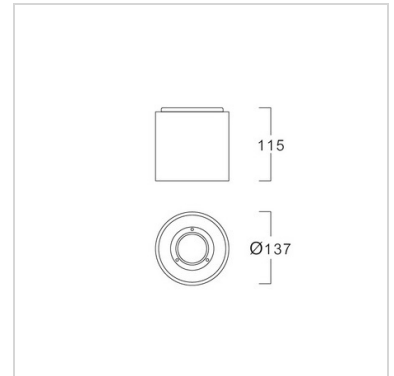

Related Products

