

LED Surface Downlight

LUMAX

 TIS SPL183

Application


Surface downlight is designed to use for office buildings, shopping centers, convenience stores, modern trade stores, discount stores, hotels, restaurants, residences, recreational centers, museums, etc.

Specification


Housing	Aluminium body
Finishing	Powder coated in white
Mounting	Surface
Power	18W
Light Source	LED MODULE
Colour Temperature	3000/4000/6500K (Tunable switch)
Lamp Output	70 lm/W
Control Gear	Built-in driver
Power Supply	220-240VAC, 50Hz
Luminaire Lifetime	30,000 hrs.
Equivalent	CFL 18-23W

Ordering Data

Model	Watt
SPL183/WH-18LED/3K,4K,6.5K-XXMD(CURVE)	18 W

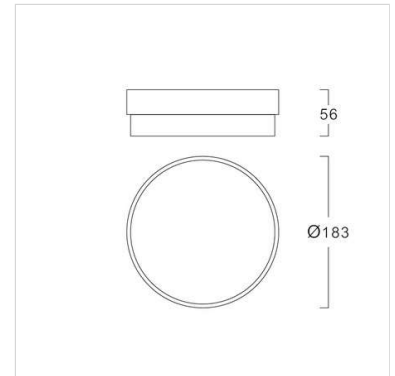

Related Products



LED MODULE