

LED Surface Square/Multi Downlight

LUMAX

 TIS **SSPL91**

Application



Surface downlight is designed to use for office buildings, shopping centers, convenience stores, modern trade stores, discount stores, hotels, restaurants, residences, recreational centers, museums, etc.

Specification

Housing	Aluminium body
Finishing	Powder coated in white
Mounting	Surface
Power	6W
Light Source	LED MODULE
Colour Temperature	3000/4000/6500K (Tunable switch)
Lamp Output	70 lm/W
Control Gear	Built-in driver
Power Supply	220-240VAC, 50Hz
Luminaire Lifetime	30,000 hrs.
Equivalent	CFL 8-14W

Ordering Data

Model	Watt
SSPL91/MH-6LED/3K,4K,6.5K-XXXD(CURVE)	6W

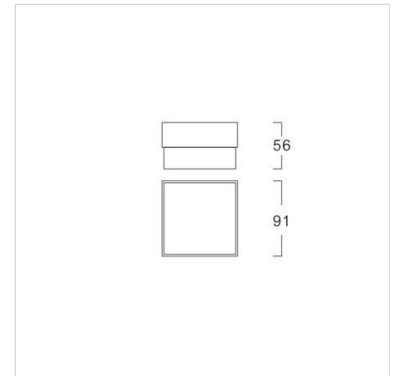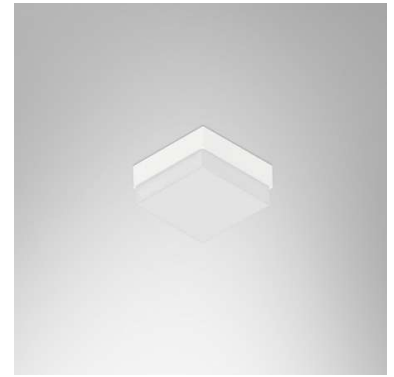

Related Products



LED MODULE