


LED Ceiling Light

LUMAX

 TIS CPL2315/REMOTE

Application


Ceiling luminaire is designed to use for residences, condominiums, rest rooms, restaurants, coffee shops, etc.

Specification

Housing	Painted steel frame
Finishing	Powder Coated in white
Diffuser	Opal acrylic
Mounting	Surface
Power	36W
Light Source	LED MODULE
Colour Temperature	3000-6500K
Lamp Output	2160 lm
Control Gear	Built-in driver
Power Supply	220-240VAC, 50Hz
IP Rating	20
Luminaire Lifetime	25,000 hrs.
Remarks	dimnable and change color temperture with remote controller

Ordering Data

Model	Watt
CPL2315-36LED/CCT&DIM/REMOTE	36W

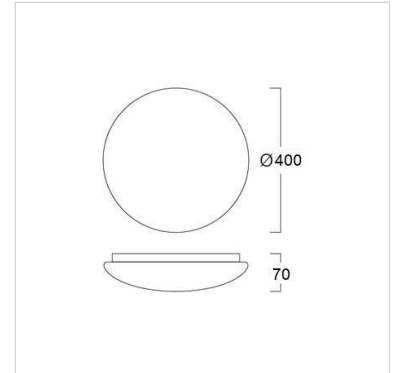

Related Products



REMOTE CONTROL