

LED Surface Downlight

LUMAX

 TIS SPL110

Application


Surface downlight is designed to use for office buildings, shopping centers, convenience stores, modern trade stores, discount stores, hotels, restaurants, residences, recreational centers, museums, etc.

Specification


Housing	Aluminium body
Finishing	Powder coated in white
Mounting	Surface
Power	6W
Light Source	LED MODULE
Colour Temperature	3000/6500K
Lamp Output	390 lm
Control Gear	Built-in driver
Power Supply	220V 50Hz
Luminaire Lifetime	30,000 hrs.
Equivalent	CFL 8-14W

Ordering Data

Model	Watt
SPL110/WH-6LED/3K-XXMD	6W
SPL110/WH-6LED/6.5K-XXMD	6W

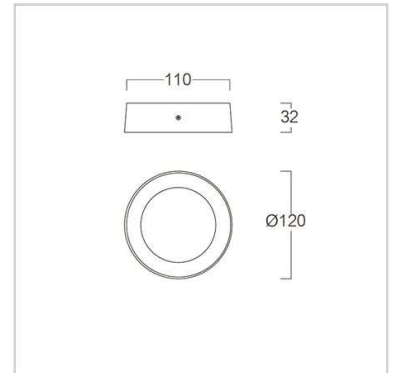

Related Products



LED MODULE