

LED
STRIP
LIGHT



SLX81

Material COB LED mounted on flexible PCB in silicone jacket

Driver Remote Driver

Life Time 50,000 hours, L70 @ 25°C

Ambient Temperature -20°C ~ 50°C

IP Rating 20, 65

CRI ≥ 90



Min.Cutting Unit Monochrome : 50mm
RGB : 50mm


Min.Cutting Unit RGBW : 33.3mm
Dynamic White : 50mm

Max. Continuous Length 5m

Control Options Monochrome : 1-10V, DALI, DMX (Via Remote Driver)
Colorchange : DMX (Via Remote Driver)
Dynamic White : DMX (Via Remote Driver)



Weight (kg) 0.2 kg/m

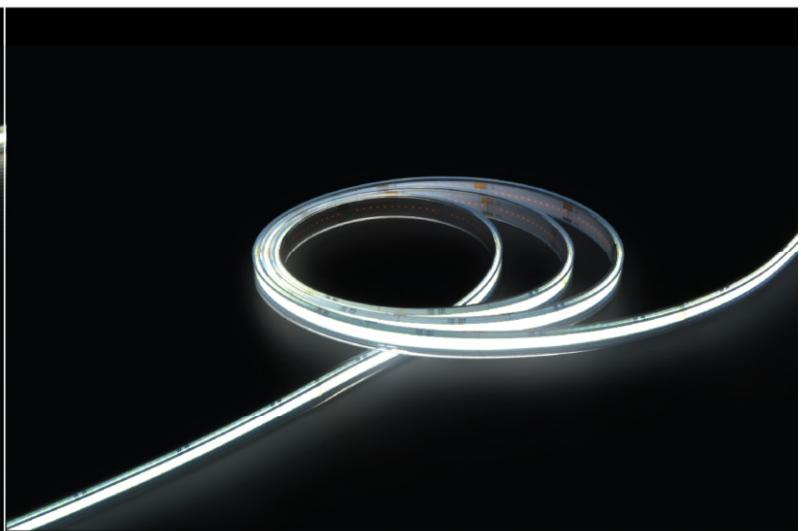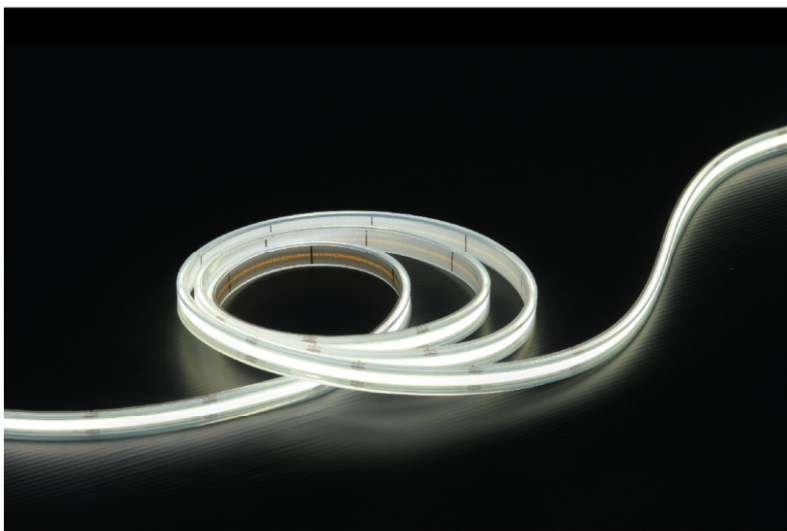

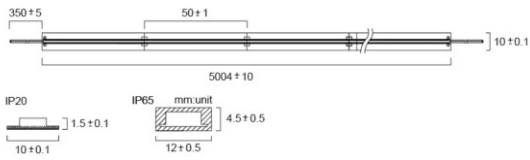


SLX81-Monochrome

Watt (W)	CCT (K)	Beam Angle (°)	Input (V)
3.5W/m	2700K (300lm/m)	110°	24Vdc
	3000K (315lm/m)		
	4000K (346lm/m)		
	6500K (380lm/m)		
6W/m	2700K (513lm/m)	110°	24Vdc
	3000K (540lm/m)		
	4000K (594lm/m)		
	6500K (653lm/m)		
12W/m	2700K (1026lm/m)	110°	24Vdc
	3000K (1080lm/m)		
	4000K (1180lm/m)		
	6500K (1300lm/m)		

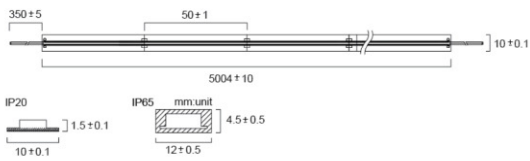

SLX81-Dynamic white


Watt (W)	CCT (K)	Beam Angle (°)	Input (V)
20W/m	Dynamic white	110°	24Vdc
	2700K-6500K (1800lm)		

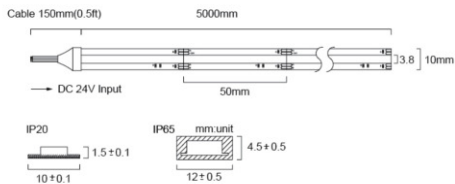

SLX81-RGB


Watt (W)	CCT (K)	Beam Angle (°)	Input (V)
12W/m	RGB (480lm/m)	110°	24Vdc

LED STRIP LIGHT

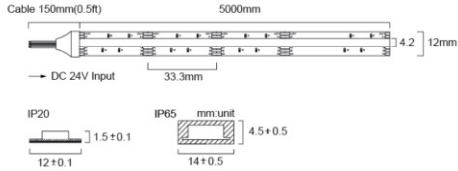


SLX81-RGBW

Watt (W)	CCT (K)	Beam Angle (°)	Input (V)
20W/m	RGBW (890lm/m)	110°	24Vdc

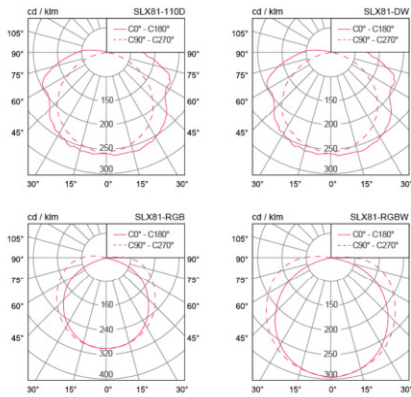

Accessories



ALS1202

W=12mm x H=2mm L=1000mm
(For without cover profile)



ALS1506

w = 15mm H= 6mm L= 1000mm
(Monochrome, Dynamic white, RGB IP65)



ALS1806

w = 18mm H= 6mm L= 1000mm
(RGBW IP65)