


LED Surface Downlight



 TIS SFP85

Specification

Housing	Die-cast aluminium lamp cover and extruded aluminium
Finishing	Powder Coated in white/black
Mounting	Surface
Power	4-7W
Source	LED-PAR16
Lamp Holder	GU10
Lamp Colour	2700 - 4000K
Lamp Output	4.3W/2700K : 380 lm 5.4W/2700K : 402 lm 7W/3000K : 620 lm
Power Supply	220VAC 50Hz
IP Rating	44
Luminaire Lifetime	15,000-50,000 hrs.
Equivalent	PAR16 35 - 50W

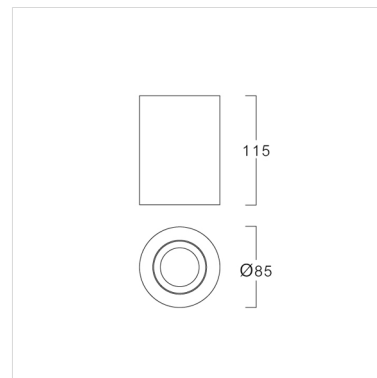

Related Products



LED-PAR16

