

# LED Surface Downlight

 TIS SAM97

## Application



Surface downlight is designed to use for office buildings, shopping centers, convenience stores, modern trade stores, discount stores, hotels, restaurants, residences, recreational centers, museums, etc.

## Specification

Housing	Die-cast aluminium lamp cover and extruded aluminium
Finishing	Powder Coated in white / black
Mounting	Surface
Power	1x4-8W (1 lamp) 2x8-16W (2 lamps)
Light Source	LED-MR16
Lamp Holder	GX5.3
Colour Temperature	2700 - 4000K
Lamp Output	6W : 2700/3000/4000/6500K : 550 lm 7W : 2700K : 550 lm 7W : 3000K : 600 lm
Control Gear	Built-in electronic transformer
Power Supply	220-240VAC, 50Hz
Power Factor	>0.9
Insulation Class	I
IP Rating	20
LED Lifetime	6W : 15,000 hrs. 7W : 25,000 hrs
Equivalent	MR16 35 - 50W

## Ordering Data

Model	Watt
SAM97/WH-1xXXLED-MR16	4-8W
SAM97/WH-2xXXLED-MR16	8-16W

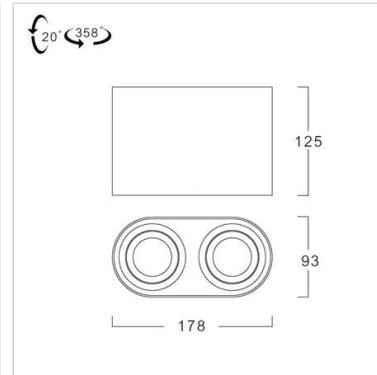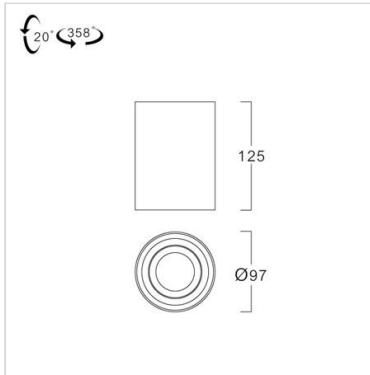

## Related Products



Honey comb



Filter



SSAM97-1xXXLED MR16

