

LED Surface Square/Multi Downlight




TIS SSAM97

Application

Surface downlight is designed to use for office buildings, shopping centers, convenience stores, modern trade stores, discount stores, hotels, restaurants, residences, recreational centers, museums, etc.

Specification


Housing	Die-cast aluminium lamp cover and extruded aluminium
Finishing	Powder Coated in white / black
Mounting Surface	Surface
Power	1x4-8W (1 lamp) 2x8-16W (2 lamps)
Light Source	LED-MR16
Lamp Holder	GX5.3
Colour Temperature	2700 - 4000K
Lamp Output	6W : 2700/3000/4000/6500K : 550 lm 7W : 2700K : 550 lm 7W : 3000K : 600 lm
Control Gear	Built-in electronic transformer
Power Supply	220-240VAC, 50Hz
Power Factor	>0.9
Insulation Class	I
IP Rating	20
LED Lifetime	6W : 15,000 hrs. 7W : 25,000 hrs.
Equivalent	MR16 35 - 50W

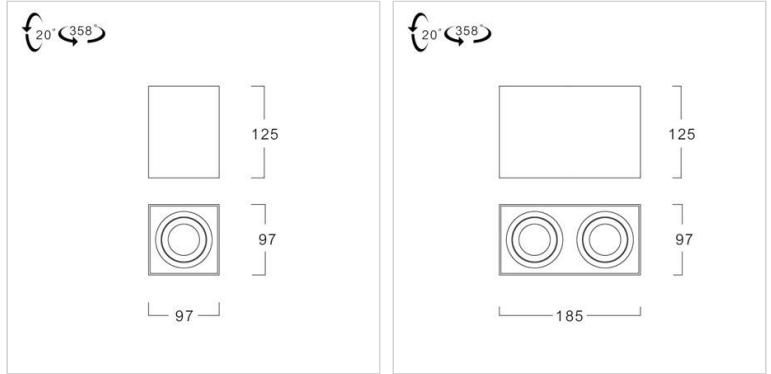

Ordering Data

Model	Watt
SSAM97/BK-1xXXLED	4-8W
SSAM97/WH-1xXXLED-MR16	4-8W
SSAM97/BK-2XLED	8-16W
SSAM97/WH-2xXXLED-MR16	8-16W

Related Products

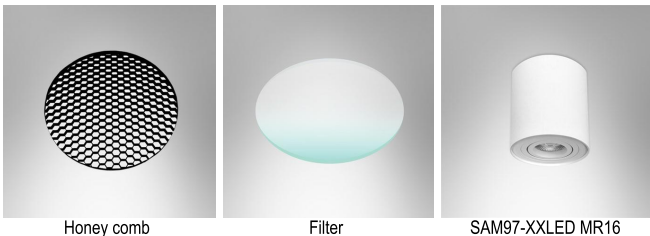

Honey comb

Filter

SAM97-XXLED MR16

