

LED Emergency / Exit Sign



TIS ESL4

Application


This luminaire is designed to use for safety reason in case of emergency situation.

Specification

Housing	Die-formed cold rolled steel
Finishing	Powder coated in white
Charger	Fully automatic solid stage with constant voltage and limit current charging
Battery	Lithium Iron Phosphate, 3.2V 2.7Ah
Dimension	375x58x247 mm.
Mounting	Surface ceiling mount
Safety	Low-high voltage cut-off to protect under discharge, over charge of battery. AC/DC fuse is well prepared to protect input and output short circuit
Power	10W
Light Source	LED Module
Power Supply	220-240VAC,50Hz
Power Factor	> 0.65
Insulation Class	I
IP Rating	20
Equivalent	T8 10W
Remarks	3 Hrs. Back-up time

Ordering Data

Model	Watt
ESL4/D-10LED	10W
ESL4/S-10LED	10W

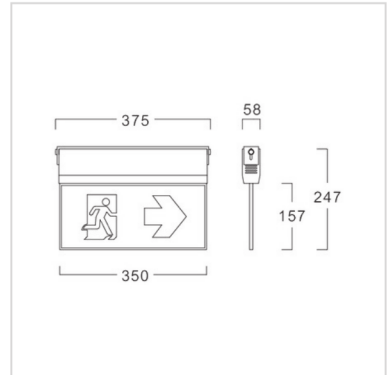

Face design

