


TIS ESLL120W/SOLAR/SENSOR-REMOTE/V2

Application

For Residential areas , Park,
Garden road

Specification

Housing	Anti-UV ABS Plastic
Description	Working 2 mode by remote controller Sensor Mode : worked by moving sensor Light output will be 100 % when moving passed. After 40-60 sec, light output will be 30% Light Mode: Light output will be 100 % all time up to capacity of battery . If battery is full, light will be on at least 7 hrs.
Finishing	Coated in Black
Solar Cell	Polycrystalline Solar panel 6V 15W
Lens	Anti-UV PC
Sensor	Photo sensor and Moving sensor inside
Dimension	635x250x55 mm
Mounting	Side entry pole or bracket arm with OD 50 mm
Warranty	One year
Power	120W
Light Source	LED Module
Colour Temperature	6500K/300K
Luminaire Output	3000lm
Control Gear	Charger built-in
Power Supply	Battery 3.2 V , 20 AH
IP Rating	65

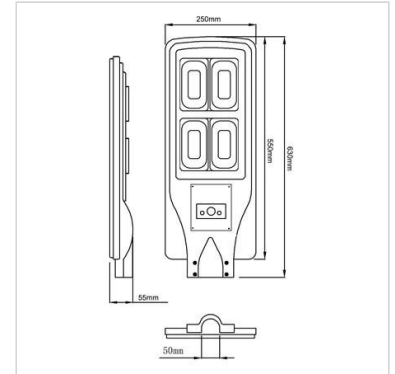

Ordering Data

Model	Watt
LUMAX # ESLL120W/BL-360LED/6K-XSXD/S&R	120W