

# LED Weatherproof

LUMAX

TIS LELWPF/CT

## Application





Weatherproof luminaire is designed to use for clean rooms, factories, warehouses, garages, storage rooms, cold rooms, etc.

## Specification

<b>Housing</b>	Polycarbonate (PC) with gear tray powder coated in white
<b>Diffuser</b>	Injection moulded clear prismatic UV stabilized polycarbonate (PC)
<b>Gasket</b>	Silicone rubber
<b>Mounting Surface</b>	Surface
<b>Power</b>	1S:8-10W (1 lamp) 1L:14-20W (1 lamp) 2S:16-20W (2 lamps) 2L:28-40W (2 lamps)
<b>Light Source</b>	LED-T8
<b>Lamp Holder</b>	G13
<b>Colour Temperature</b>	3000/4000/6500K
<b>Lamp Output</b>	1S:L&E : 8/9/10W:1050 lm 1L:L&E : 14/16/18/20W:2100 lm 2S:L&E : 2x8/9/10W:2x1050 lm 2L:L&E : 2x14/16/18/20W:2x2100 lm
<b>Luminaire Output</b>	1S : 8/9/10W : 927 lm 1L : 14/16/18/20W : 1778 lm 2S: 16/18/20W : 1854 lm 2L: 28/32/36/40W : 3557 lm
<b>Power Supply</b>	220VAC 50Hz
<b>Insulation Class</b>	I
<b>IP Rating</b>	65
<b>LED Lifetime</b>	L&E: 25,000/50,000 hrs.
<b>Equivalent</b>	8-10W : T5 1x14W/T8 1x18W 14-20W : T5 1x28W/T8 1x36W 16-20W : T5 2x14W/T8 2x18W 28-40W : T5 2x28W/T8 2x36W

## Ordering Data

Model	Watt
LELWPF/1S/CT-XXLED-T8	8-10W
LELWPF/1L/CT-XXLED-T8	14-20W
LELWPF/2S/CT-XXLED-T8	16-20W
LELWPF/2L/CT-XXLED-T8	28-40W

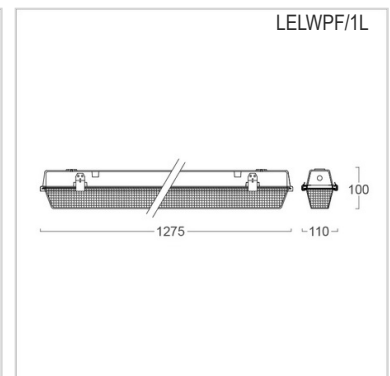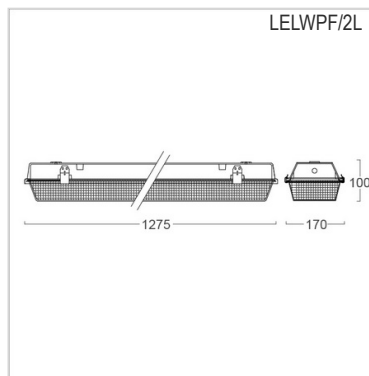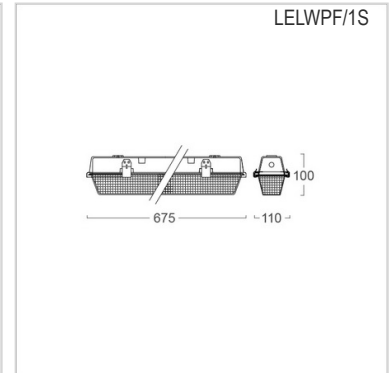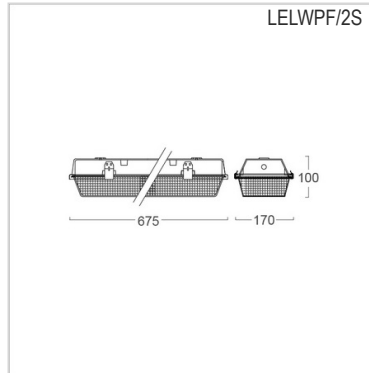

## Related Products



Cable gland



Suspension Bracket 1 lamp



Suspension Bracket 2 lamps



LED-T8

