

LED Canopy / Tunnel




TIS RCL435

Application

Canopy is designed to illuminate tunnels, underpasses, warehouses, garages, indoor gymnasiums, recreational and competition sport fields, etc.

Specification

Housing	Die-cast aluminium
Front Cover	Clear toughened glass
Finishing	Powder coated in white
Lens	Acrylic (PMMA)
Gasket	Silicone rubber
Dimension	290x423x143 mm.
Cut Out	270x405 mm.
Mounting	Recessed
Power	55/70/105W
Light Source	LED Module
Colour Temperature	3000/4000/5700K
Luminaire Output	55W : 7700 lm (94/110 degree) 55W : 6600 lm (FW4) 70W : 9800 lm (94/110 degree) 70W : 8400 lm (FW4) 105W : 14175 lm (94/110 degree) 105W : 12600 lm (FW4)
Beam Angle	Symmetrical distribution : 94/110 degree Asymmetrical distribution : FW4
Control Gear	Built-in driver
Power Supply	220-240VAC, 50Hz
Power Factor	>0.95
Insulation Class	I
IP Rating	66
Luminaire Lifetime	50,000 hrs.
Equivalent	55W : MH 100W 70W : MH 150W 105W : MH 250W

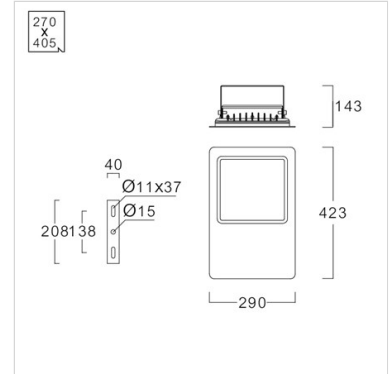

Ordering Data

Model	Watt
RCL435-55LED	55W
RCL435-70LED	70W
RCL435-105LED	105W

