

SLU02



LED UNDERWATER

Mini underwater recessed wall light which delivers a distinctive light output for directive application or decorative lighting patterns creation. Durable dynamic interaction with the surrounding architectural environment and functional orientation signaling are enhanced by this discretely essential solution.



IK08



24
VDC

Material :

316 stainless steel and tempered glass cover

Driver :

Remote 24 Vdc constant voltage driver

Life Time : 50,000 hrs, (L70) @ 25°C

Ambient Temperature : -40°C ~ 50°C

IP Rating : 68

IK : 08





Ra : ≥ 80

Factory Supplied Cable :

2C x 1 mm², L = 3 m

Control : on-off

Weight (kg) : 0.4 kg

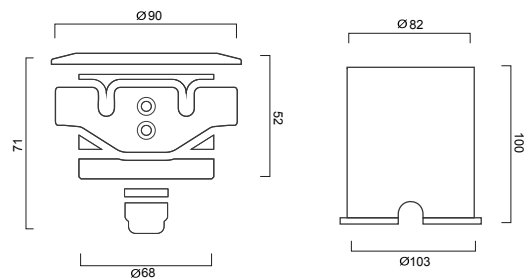

Model
SLU02

Watt
4.8W

CCT. (K)
3000K (380lm)

Beam Angle
15°
40°
60°

Color
Stainless steel

Input (V)
24 Vdc