

SLF03



LED LINEAR WALL WASHER

SLF03 is a smart and compact solution for the widest variety of outdoor architectural lighting application. The technologically advanced SLF03 linear modules series features high brightness LED lightsource in both monochrome and RGB .

**Material :**

Extrusion aluminium body, die – casting aluminium end cap, toughened front glass

Finishing :

UV-resistant polyester exterior powder-coating

Driver :

Remote 48 Vdc constant voltage driver

Life Time : 50,000 hrs, L70 @ 25°C

Ambient Temperature : -20°C ~ 40°C

IP Rating : IP65

Ra : ≥ 80



Factory Supplied Cable :

2 x 0.3 m for Power cable with connector (IN/OUT) (monochrome)

2 x 0.3 m for Power and Data cable with connector (IN/OUT for RGBW and Dynamic white)

Control : on-off, DMX

Weight (kg) : 1.9 kg/m

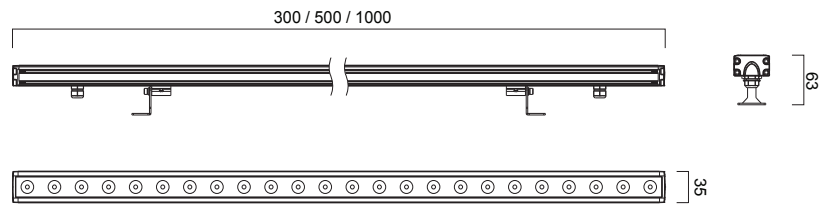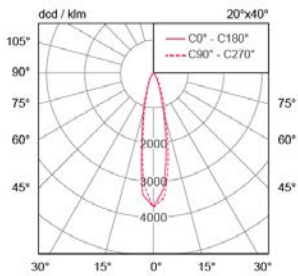

Accessories



Feeder Cable L = 50 cm



2-Way



3-Way



Junction Box

Junction Connector

Model	Watt	CCT. (K)	Beam Angle	Color	Input (V)
SLF03	7.2W (L=300mm)	3000K (2040lm)*	20°	Grey	48 Vdc
	12W (L=500mm)	4000K (2112lm)*	30°		
	24W (L=1000mm)	6000K (2280lm)*	40°		
		RGBW (1048lm)*	20°x40°		
		Dynamic White 2700K-6500K (2136lm)			

* Lumen refers to 24W

Caution : Do not make any connection while the power is turning on! This action may cause the product damaged.