

# SLF624

---



## LED LINEAR WALL WASHER

SLF624 is a high performance linear LED luminaire for grazing or flood lighting exterior walls and facade, the luminaire is available in 0.5 m and 1.0 m sections. Luminaire that make it easy to conceal and integrate into architectural facades. Various colour temperatures, many range beam angle. Providing exceptional uniformity and brightness for walls and signage.

**Material :**

Extrusion Aluminium body with toughen front glass

**Finishing :**

Silver Anodised

**Driver :**

Remote 24 Vdc constant voltage driver

**Life Time :** 50,000 hrs, L70 @ 25°C

**Ambient Temperature :** -20°C ~ 40°C

**IP Rating :** 65





**Ra :** ≥ 80

**Factory Supplied Cable :**

2 x 0.3 m for Power cable with connector (IN/OUT)

**Control :** on-off, 0-10V, DALI

**Weight (kg) :** 0.5-1.0 kg

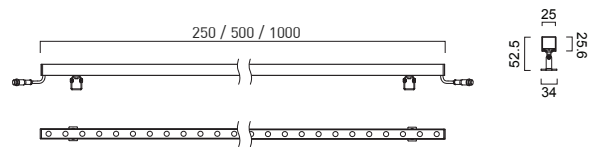

## Accessories



Feeder Cable L = 30 cm



Extension Cable L = 1 m



2-Way



3-Way



Junction Box



Louver Anti-glare

Model	Watt	CCT. (K)	Beam Angle	Color	Input (V)
SLF624	7.5W (L = 250mm)	2700K (1800lm)*	15°	Silver	24 Vdc
	15W (L = 500 mm)	3000K (1850lm)*	30°		
	30W (L = 1000 mm)	4000K (2025lm)* 6000K (2200lm)*	10° x 33°		

\* Lumen refers to 30W model

Caution : Do not make any connection while the power is turning on! This action may cause the product damaged.