

# LED Pendant

TIS LPLP

## Application



Pendant luminaire is designed to use for office buildings, book stores, discount stores, shopping centers, convenience stores, residences, hotels, restaurants, hospitals, etc.

## Specification

<b>Housing</b>	Extruded aluminium
<b>Finishing</b>	Powder coated in grey, white or black
<b>Diffuser</b>	Acrylic (PMMA)
<b>Mounting</b>	Suspension wire
<b>Power</b>	1S:8-10W (1 lamp) 1L:14-20W (1 lamp)
<b>Light Source</b>	LED-T8
<b>Lamp Holder</b>	G13
<b>Colour Temperature</b>	3000/4000/6500K
<b>Lamp Output</b>	1S:L&E : 8/9W:1050 lm 1L:L&E : 14/16/18W:2100 lm
<b>Luminaire Output</b>	1S : 8/9W : 645 lm 1L : 14/16/18W : 1290 lm
<b>Power Supply</b>	220VAC 50Hz
<b>Insulation Class</b>	I
<b>IP Rating</b>	20
<b>LED Lifetime</b>	L&E:25,000/50,000 hrs.
<b>Equivalent</b>	8-10W:T5 1x14W/T8 1x18W 14-20W:T5 1x28W/T8 1x36W
<b>Remarks</b>	Option 1.Box with Transparent Wire 1.5m

## Ordering Data


Model	Watt
LPLP/1S/OT-XXLED-T8	8-10W
LPLP/1L/OT-XXLED-T8	14-20W

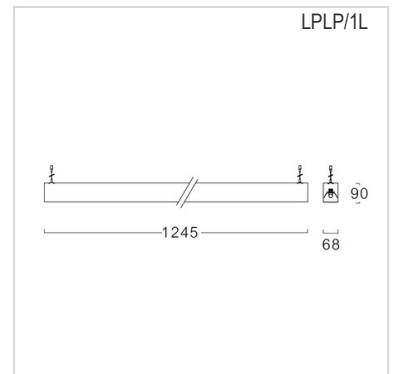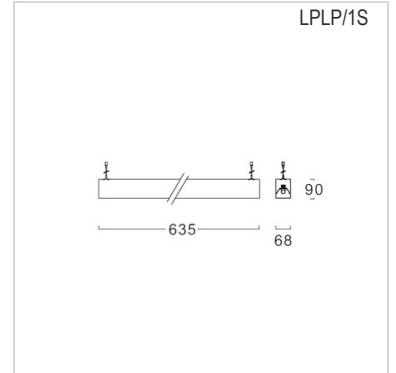

## Related Products



LPLP/WH



LPLP/BK



LED-T8



Box with Transparent Wire  
1.5m

