

LED Pendant


PLPL105

Application


Pendant luminaire is designed to use for office buildings, book stores, discount stores, shopping centers, convenience stores, residences, hotels, restaurants, hospitals, etc.

Specification


| | |
|---------------------------|--|
| Housing | Extruded aluminium |
| Finishing | Powder coated in grey, white or black |
| Diffuser | Acrylic (PMMA) |
| Mounting | Suspension wire |
| Power | 1S : 11/14/16/19W 1L : 22/28/32/38W |
| Light Source | LED Module |
| Colour Temperature | 3000/4000/6500K |
| Luminaire Output | 1S : 11W : 1200 lm, 14W : 1520 lm 1S : 16W : 1785 lm, 19W : 2050 lm 1L : 22W : 2400 lm, 28W : 3040 lm 1L : 32W : 3570 lm, 38W : 4100 lm |
| Control Gear | Built-in driver |
| Power Supply | 220-240VAC, 50Hz |
| Power Factor | >0.9 |
| Insulation Class | I |
| IP Rating | 20 |
| Luminaire Lifetime | 30,000 hrs. |
| Remarks | Option 1.Box with Transparent Wire 1.5m 2.Luminaire connector (Continued) |

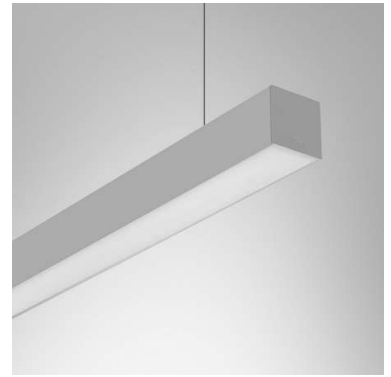

PLPL105/1S



PLPL105/1L



Ordering Data

| Model | Watt |
|------------------|------|
| PLPL105/1S-11LED | 11W |
| PLPL105/1S-14LED | 14W |
| PLPL105/1S-16LED | 16W |
| PLPL105/1S-19LED | 19W |
| PLPL105/1L-22LED | 22W |
| PLPL105/1L-28LED | 28W |
| PLPL105/1L-32LED | 32W |
| PLPL105/1L-38LED | 38W |

Related Products



PLPL105/WH



PLPL105/BK



LED Strip Module



Luminaire connector
(continued)



Box with Transparent Wire
1.5m

