

LED Table Lamp




 TIS TPL310/UD

Application

This luminaire is designed to use for office, shopping mall, school, hospitals, desk reading and other working areas where is required highly uniformity illumination, etc.

Specification

Housing	Extruded aluminium
Description	The Luminarie combined with the concept of indirect/direct lighting distributions
Finishing	Powder coated in grey
Diffuser	Excellent transmission microprism
Mounting	Desk light
Power	60W
Light Source	LED Module
Colour Temperature	4000/6000K
Luminaire Output	30/30W : 3000/3000 lm
Beam Angle	110/90 Degree
UGR	<18
Control Gear	Built-in driver
Power Supply	220-240VAC, 50Hz
Power Factor	>0,9
Insulation Class	I
IP Rating	20
Luminaire Lifetime	30,000 hrs
Remarks	Pole height can be maximum 1.5 meter.

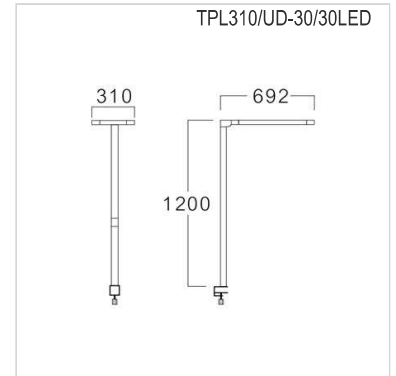

Ordering Data

Model	Watt
TPL321/UD-30/30LED	60W

Related Products



LED Strip Module



FLPL310/UD