






LLBW

Application

This luminaire is designed to use for convenience stores, discount stores, modern trade stores, factories, schools, storage areas, hospitals, hotels, shopping centers, corridors, industrial areas, car parks, etc.

Specification


Housing	Die-formed cold roll steel cover with wire mesh
Finishing	Powder coated in white
Mounting	Surface or Suspended
Power	1S:8-10W (1 lamp) 1L:14-20W (1 lamp) 2S:16-20W (2 lamps) 2L:28-40W (2 lamps)
Source	LED-T8
Lamp Holder	G13
Lamp Colour	3000/4000/6500K
Lamp Output	1S:L&E : 8/9W:1050 lm 1S:LUMAX : 9W:1050 lm 1L:L&E : 14/16/18W:2100 lm 1L:LUMAX : 18W:2100 lm 2S:L&E : 2x8/9W:2x1050 lm 2S:LUMAX : 2x9W:2x1050 lm 2L:L&E : 2x14/16/18W:2x2100 lm 2L:LUMAX : 2x18W:2x2100 lm
Luminaire Output	1S : 8/9W : 740 lm 1L : 14/16/18W : 1480 lm 2S: 16/18W : 1650 lm 2L: 28/32/36W : 3300 lm
Power Supply	220VAC 50Hz
IP Rating	20
LED Lifetime	LUMAX:25,000 hrs. L&E:25,000/50,000 hrs.
Equivalent	8-10W:T5 1x14W/T8 1x18W 14-20W:T5 1x28W/T8 1x36W 16-20W:T5 2x14W/T8 2x18W 28-40W:T5 2x28W/T8 2x36W

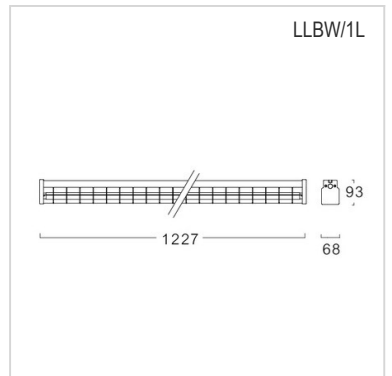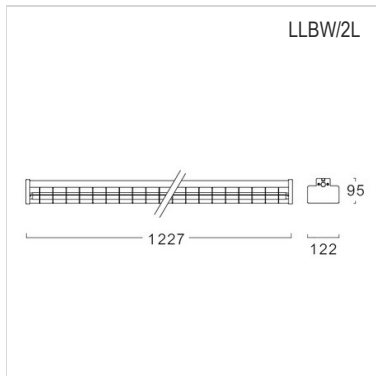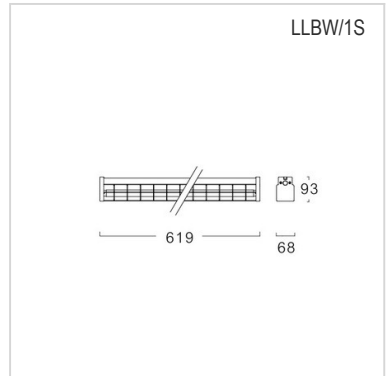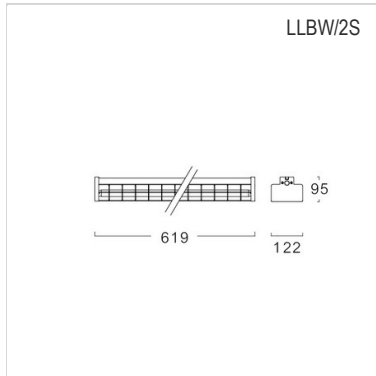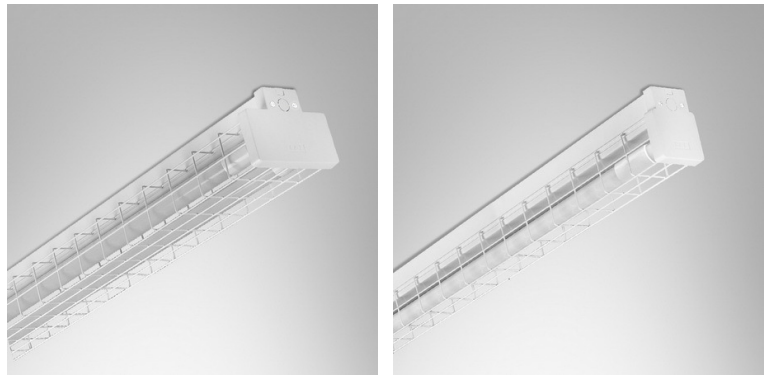

Ordering Data

Model	Watt
LLBW/1S/OT-XXLED-T8	8-10W
LLBW/1L/OT-XXLED-T8	14-20W
LLBW/2S/OT-XXLED-T8	16-20W
LLBW/2L/OT-XXLED-T8	28-40W

Related Products

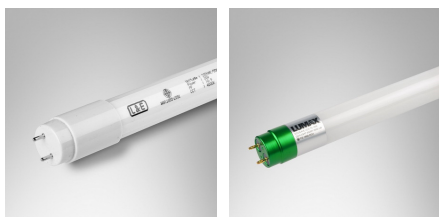

LED-T8

LED-T8

