

Dawn S 800

2350 lm 33 W 24V 940 matte black + susp 1500 mm


ARTICLE NO: 16801201D0D



● Matte Black



Dimension

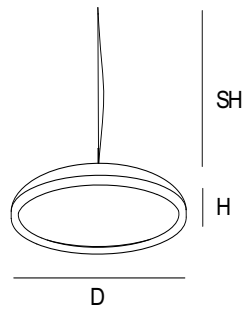


Dimension (mm): D: 807 H: 173 SH: 1500

Product description

Chromaticity tolerance (initial MacAdam): 2 **Installation:** Suspended (S)
IP protection : IP20 **Lumen maintenance factor:** 50000h L90 B10 at 25°C
Luminaire luminous flux: 2348 lm **Led colour:** 4000K, CRI>90 **Power:** 33 W
Weight: 4,80 kg **Correlated colour temperature - CCT:** 4000 K
Nominal luminaire luminous flux: 2350 lm **Colour rendering index - CRI:** 90
Light source luminous flux: 4125 lm **Driver:** Driver not included, order separately
Forward voltage (Vf): 24 V **Power Supply Range:** 24V DC **Material:** Aluminium, powder coated **Body Colour:** Matte Black

Photometry

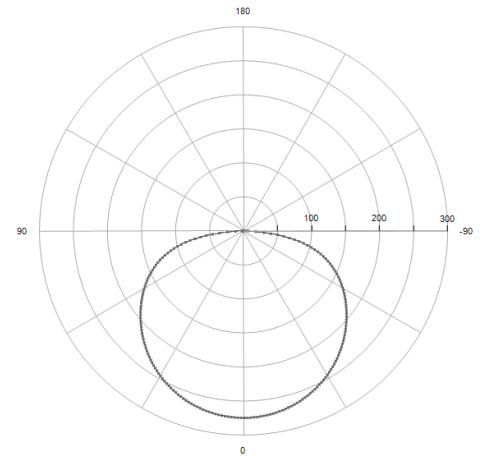

Light output ratio

LOR	100
ULOR	0
DLOR	100
Luminaire efficacy (LEF)	72

UGR values

X=4H, Y=8H	S = 0,25H
Radiant class	70/50/20
Transverse	21.2
Longitudinal	21.2

Classification

BZ	BZ 6 / 0.8 / BZ 5
UTE	1.00 G
DIN	A20
CIE	39 70 92 100 100

Dawn S 800

2350 lm 33 W 24V 940 matte black + susp 1500 mm

ARTICLE NO: 16801201D0D

Drivers



Driver LC
702120276
35W 24V FO

CeilingCup



Ceiling cup RD 250 B1G
109K4280002
with bottom exit D250 mm 24V 60W FO black