


Futon Acoustic C/W

611 690 lm 14 W 24V 940 sand/matte white

ARTICLE NO: 16791100D01B




● Matte White

● Sand



Dimension



Dimension (mm): D: 611 H: 27

Product description

Chromaticity tolerance (initial MacAdam): 2 **Installation:** Ceiling or wall (CW)

Lumen maintenance factor: 50000h L90 B10 at 25°C **IP protection :** IP40

Led colour: 4000K, CRI>90 **Correlated colour temperature - CCT:** 4000 K

Colour rendering index - CRI: 90 **Nominal luminaire luminous flux:** 690 lm

Light source luminous flux: 1615 lm **Driver:** Driver not included, order separately


Forward voltage (Vf): 24 V **Power Supply Range:** 24V DC **Material:** Extruded

aluminium profile, powder coated with acoustic central plate **Panel type:** High effectiveness Sound absorber panel, made from 100% polyester recycled plastic bottles. Textile cover meets the highest European standards of flame retardant materials.

Body Colour: Matte White **Acoustic panel colour:** Sand **Power:** 14 W

Weight: 1,60 kg

Photometry

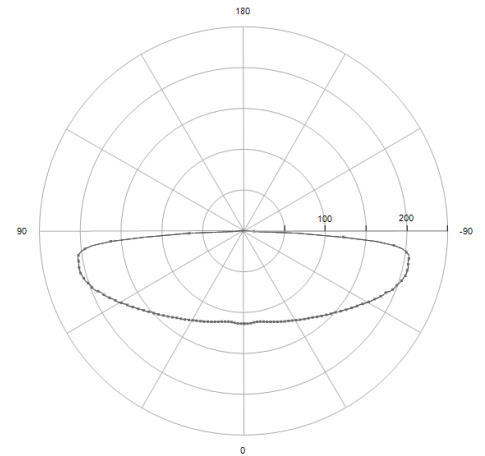

Light output ratio

LOR	100
ULOR	0
DLOR	100
Luminaire efficacy (LEF)	51

UGR values

X=4H, Y=8H	S = 0,25H
Radiant class	70/50/20
Transverse	23.4
Longitudinal	23.4

Classification

BZ	BZ 9 / 2.5 / BZ 8 / 3 / BZ 9 / 4 / BZ 8
UTE	1.00 J
DIN	A10
CIE	20 44 75 100 100

Futon Acoustic C/W

611 690 lm 14 W 24V 940 sand/matte white

ARTICLE NO: 16791100D01B

Drivers



Driver LC

702120244

60W 24V FO